

## Index Plungers • with mounting flange, horizontal, stainless steel

22110.2305



## Product Description

Index plungers are used for indexing bores.

## Material

## Housing

- Stainless steel 1.4308, precision casting, bright, matt blasted

## Locking pin

- Stainless steel 1.4305

## Pull-ring

- Stainless steel 1.4310

## Assembly

Assembly by means of washers ISO 7092.

## Operation

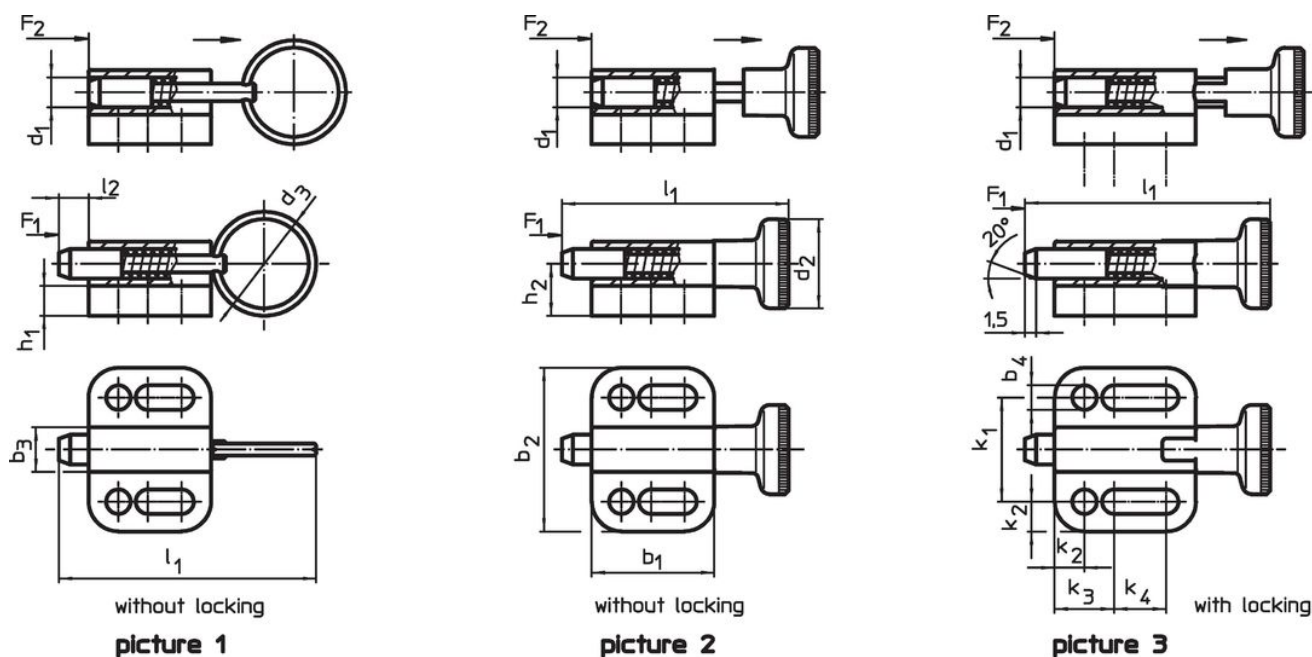
When using locking index plungers, the knob is pulled-out, turned 90° and secured by a notched catch (when locking pin should not overhang).

## More information



## Notes

Knob not removable.

## Drawing



## Order information

Dimensions														Spring load <sup>1)</sup>				Art. No.
d <sub>1</sub>	d <sub>3</sub>	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	h <sub>1</sub>	h <sub>2</sub>	k <sub>1</sub>	k <sub>2</sub>	k <sub>3</sub>	k <sub>4</sub>	l <sub>1</sub>	l <sub>2</sub>	F <sub>1</sub>	F <sub>2</sub>	max.		
h11					-0.2			±0.05					min.	~	~			
[mm]														[N]	[°C]	[g]		
with pull-ring, without locking – picture 1																		
5	18	22	28	8	4.3	4.5	9.5	18	5	10	7	45	5	5	24	100	24	22110.2305

<sup>1)</sup> statistical average value

## Compliance

### RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

### Does not contain Proposition 65 substances

No Proposition 65 substances included.

<https://www.P65Warnings.ca.gov/>

### Free from Conflict Minerals