# Mounting Pads 22590.0212



# **Product Description**

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

# Material

# **Ball element**

• Stainless steel 1.4305

# Pad


• Stainless steel 1.4305


# More information

# Notes

For the versions  $d_1$  = M10 and M12 the lock nut conforms to DIN 934.

# Drawing



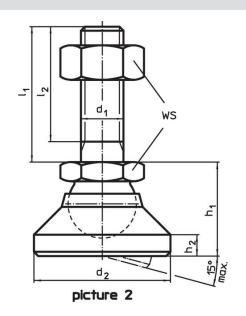


# **Order information**

Dimensions					ws	WS Load capacity for static load		Ĭ	Art. No.
d <sub>1</sub>	d <sub>2</sub>	h <sub>1</sub> ~	h <sub>2</sub>	t		max.	max.		
[mm]					[mm]	[kN]	[°C]	[g]	
pad and ball element – picture 1, Stainless steel									
M12	40	26	6	11	19	28	250	113	22590.0212



Halder France SAS www.halder.fr Page 1 of 2 Published on: 4.2.2024

# **Application example**

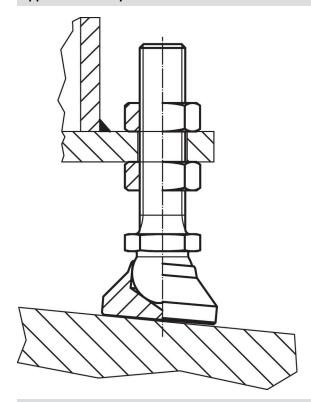

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

# **Does not contain Proposition 65 substances**

No Proposition 65 substances included.

https://www.P65Warnings.ca.gov/

# **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Halder France SAS www.halder.fr Page 2 of 2