# Loose Slot Tenons • DIN 6323

# 23120.0016



### **Product Description**


To be used for locating fixtures and clamping elements onto machine tables with T-slots to DIN 650.

Being simply pushed into position after fixture or clamping element has been roughly positioned, they cannot cause damage to the machine as could protruding fixed slot tenons or low slot tenons.

#### **Material**

· Steel, case-hardened, blackened, ground


## **Drawing**

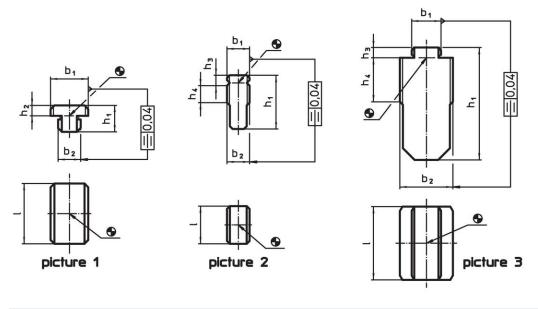

### **Order information**


T-slot size	T-slot size	Dimensions			I	Art. No.
fixture	machine	h <sub>1</sub>	h <sub>2</sub>	ı	_	
b <sub>1</sub>	b <sub>2</sub>					
h6	h6					
[mm]	[mm]		[mm]	•	[g]	
form A, b <sub>1</sub> > b <sub>2</sub> – picture 1						
20	16	14	5.5	32	61	23120.0016


### **Application example**





Halder France SAS www.halder.fr





### Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### **Does not contain SVHC substances**

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Halder France SAS

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.fr Page 2 of 2

Published on: 4.2.2024