# **Floating Clamps** • compact construction, combined clamping and locking M 12 23320.0008



#### **Product Description**

The floating clamp is used to **clamp and support** additional clamping points on components. The benefits of the floating clamp are:

- · Avoids vibration during the processing
- · Clamps ribs, beads and shackles to reinforce clamped components
- Distortion-free clamping of raw parts
- · Compact version with reduced height.

#### Material

## Adjustable body

· Aluminium, red anodised

#### Body

 Case-hardened steel, nitrided, manganese phosphated and ground

#### **Clamping jaws**

 Case-hardened steel, nitrided, manganese phosphated

### Assembly

- 1. Mount the floating clamp onto the device (mounting holes for M 6, see drawing).
- Adjust the height limit stop and the rotating area with the sleeve, and clamp with set screw (4x WS 2.5). When setting the height limit upwards provide generous clearance (workpiece tolerance).

#### Operation

1. Push the floating clamp downwards.

- 2. Pivot the clamping jaws in as far as possible. The floating clamp contacts the bottom of the workpiece with a slight spring load.
- 3. Tighten the floating clamp with a hexagonal nut (WS 18) having a min. torque of 15 Nm and a maximum torque of 30 Nm. In the clamping process, the workpiece is clamped and simultaneously supported.
- 4. Releasing is done in reverse order.

#### More information

#### Notes

For specific clamping situations, the standard clamping jaws supplied can be exchanged or replaced (see catalogue drawing: screw ISO 4762 - M8 - 12.9, M max. = 43 Nm).


#### Accessories

As an accessory, we offer clamping jaws with an increased clamping range, refer to 23320.0050-.0058, as well as pivot jaws, refer to 23320.0148-.0156.

#### **Further products**


- Nuts for T-Slots, DIN 508
- · Nuts for T-Slots, extended
- Standard Clamping Jaws, for floating clamp M 12
- Clamping Jaws, for floating clamp M 12


## Drawing

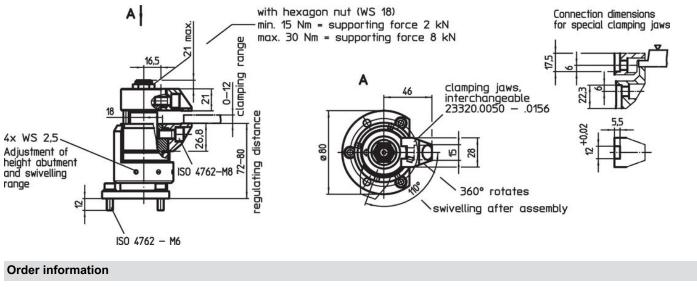



li l	Art. No.
[9]	
1654	23320.0008

## **Application example**









## Compliance

#### **RoHS compliant**

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w Contains lead - SVHC list [REACH] as of 23.01.2024.

**Contains Proposition 65 substances** 



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.