# Adjustable Tension Levers 24440.0228



# **Product Description**

#### Material

Lever

Steel, blackened

Inner partsSteel, blackened, quality 5.8

Screw

• Steel, blackened, quality 5.8

## Ball knob

• Thermosetting plastic PF 31, black, DIN 319

## Operation


**By lifting the lever** the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

#### More information

#### Notes

The threaded portion can be exchanged.

Drawing

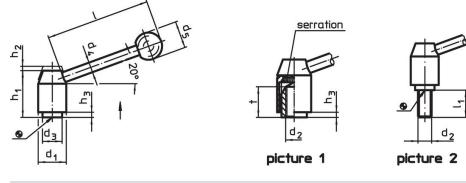

# **Order information**

Dimensions										<b>I</b>	Art. No.
d <sub>1</sub>	d <sub>2</sub>	l <sub>1</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	I	-	
									~		
[mm]										[g]	
with screw – picture 2, Steel											
24	M10	40	16	10	25	40	4.5	2.5	96	184	24440.0228

# Compliance

#### **RoHS compliant**

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w Contains lead - SVHC list [REACH] as of 23.01.2024.

#### **Contains Proposition 65 substances**

Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

# Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

