Tapered Shaft Hubs • with lock nut, stainless steel25050.0312



Product Description

It is a self-centering and non-floating tapered shaft hub in corrosion-protected design with a hexagon nut and a lock nut.

The rotational accuracy of the tapered shaft hubs is 0,03 mm.

By using tapered shaft hubs, all shaft-hub joints of machine elements such as sprocket wheels, gear wheels, belt pulleys, cams, levers etc. can be easily and efficiently established.

Material

External part

· Stainless steel, nickel-plated

Inner part

Stainless steel, nickel-plated

Nut

· Stainless steel, nickel-plated, hardened

Assembly


The lock nut at the outer part facilitates locking of the shaft-hub joint if freely rotating shafts are involved. For mounting, a cresent wrench (thickness max. I_2 - I_3) is used.

More information

References

Comply with mounting instructions, mounting examples, and technical data.

Drawing

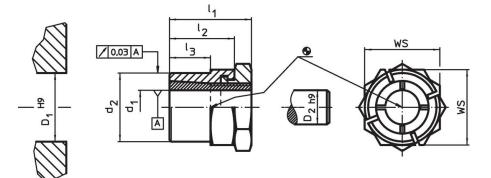

Order information

	Dimensions			WS	Tightening	Transferable	Transferable	Surface	Surface	Hub bore	Shaft diameter		Art. No.		
d₁	d	,	I1	I2	I ₃		torque of	torque	axial load	pressure	pressure	D 1	D ₂	-	
		-	·	-	Ŭ		the nut	м	Fa	of shaft	of hub	H9	h9		
							TA	max.	max.	pw	р _N				
							max.			max.	max.				
	[mm]			[mm]	[Nm]	[Nm]	[kN]	[N/mm²]	[N/mm²]	[mm]	[mm]	[g]			
12	20	0 2	24	19	12	22	31	45.7	7.6	144	128	20	12	43	25050.0312

Accessories

	WS [mm]	[9]	Art. No.
special fork wrench	27	195	25050.0827

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.