# Spring Plungers • with ball and slot - INCH

2B050.0132



### **Product Description**

To be used for positioning, indexing, locking, latching as well as for other similar pressure applications.

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.

### **Material**

### **Body**

• Stainless steel 1.4305 (ASTM-A-582)

#### Ball

· Stainless steel, hardened

### **Spring**

· Stainless steel

### Characteristic

Standard spring load: no marking







### More information

#### Notes

Special types on request. Spring plungers are specially tested for spring range and forces.

This product is manufactured in INCH dimensions.

### References


A conversion table can be found in the technical data following these product information pages.

Thread lock: polyamide spot coating (for details please refer to the technical appendix). Calculation of indexing resistance, please refer to appendix - Technical Data -

### **Further products**

· Spring Plungers, with ball and slot

### Drawing



### **Order information**


Dimensions						Stroke Spring load <sup>1)</sup>				I	Art. No.
d <sub>1</sub>		Thread	d <sub>2</sub>	1	S	F <sub>1</sub>	F <sub>2</sub>	min.	max.		
	[in]		[in]		[in]	[11		[°F]		[oz]	
stainless steel, standard spring load, Without thread lock											
#5-40	0.125	2A-UNC	1/16	1/4	0.02	0.3	0.8	-22	482	0.007	2B050.0132

<sup>1)</sup> statistical average value

Halder France SAS www.halder.fr Page 1 of 2

Page 1 of 2 Published on: 8.4.2024

### **Application example**

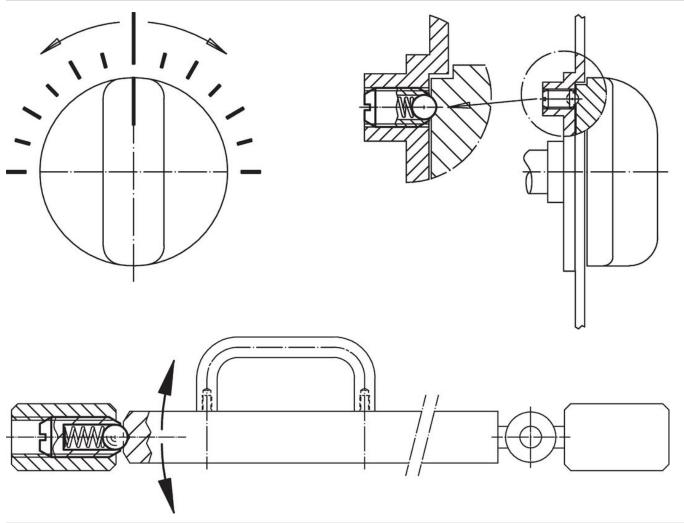

### Compliance

### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

### **Does not contain SVHC substances**

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.fr Page 2 of 2
Published on: 8.4.2024