# **Compact Clamps**

EH 23690.



## **Product Description**

The compact clamps are all purpose clamping elements. Due to the self-locking tension lever application can either take place in horizontal or vertical position in both, machined and raw workpieces.

#### Features:

- Exact and position precise clamping
- Easy, universal handling
- High clamping force at low tightening torques, abrasion-resistant due to tension lever with
- Continuous, large clamping area
- Tension lever entirely retractable for hindrance-free exchange of workpieces
- Tension lever with locating thread for various clamping elements, e.g. ball-ended thrust screws (EH 22700. - EH 22720.), self-aligning pads (EH 22730. / EH 22740.) etc.
- Large adjusting range at constant clamping force
- Continuous increase of the clamping range by height adapters 23690.0112 / .0116
- Easy and flexible mounting options
- Corrosion-resistant
- · Resistant to dirt and chips

#### **Material**

#### **Body**

· Heat-treated steel, black coated

#### **Tension lever**

· Heat-treated steel, tempered, silver coated

#### **Assembly**

Assembly and Set-Up:

- 1. Take out stop pin ISO 4762-M 6 x 10.
- 2. Move back and take out tension lever.
- 3. Tightening by 2 screws with internal hexagon (included in supply volume).
- 4. Place tension lever in sliding rail and then insert
- 5. Tighten stop pin ISO 4762 M 6 x 10.

#### **Operation**

Clamping Process:

- 1. Slide tension lever to clamping position.
- 2. Clamping is made via a hexagon collar screw.
- 3. Releasing is done in reverse order.

#### More information


#### **Further products**

· Height Adapters, for compact clamp



Halder France SAS www.halder.fr Page 1 of 4 Published on: 8.4.2024

## **Drawing**

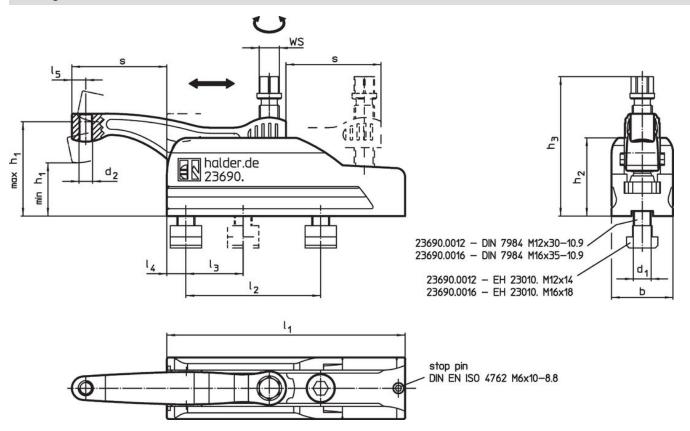



# **Order information**


Dimensions												ws	Clampinç	Tightening	I	Art. No.	
d <sub>1</sub>	d <sub>2</sub>	h <sub>1</sub>	h₁	h <sub>2</sub>	h <sub>3</sub>	s	I <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	I <sub>4</sub>	I <sub>5</sub>	b		force	torque	_	
		min.	max.			max.		+1						max.	max.		
[mm]												İ					
						[mm]							[mm]	[kN]	[Nm]	[g]	
M12	M 8	40	60	59	95	[mm] 43	134	70	50	13	10.0	45	[mm] 16	[ <b>kN</b> ]	[Nm] 45	<b>[g]</b> 1840	23690.0012

www.halder.fr

# **Application example**

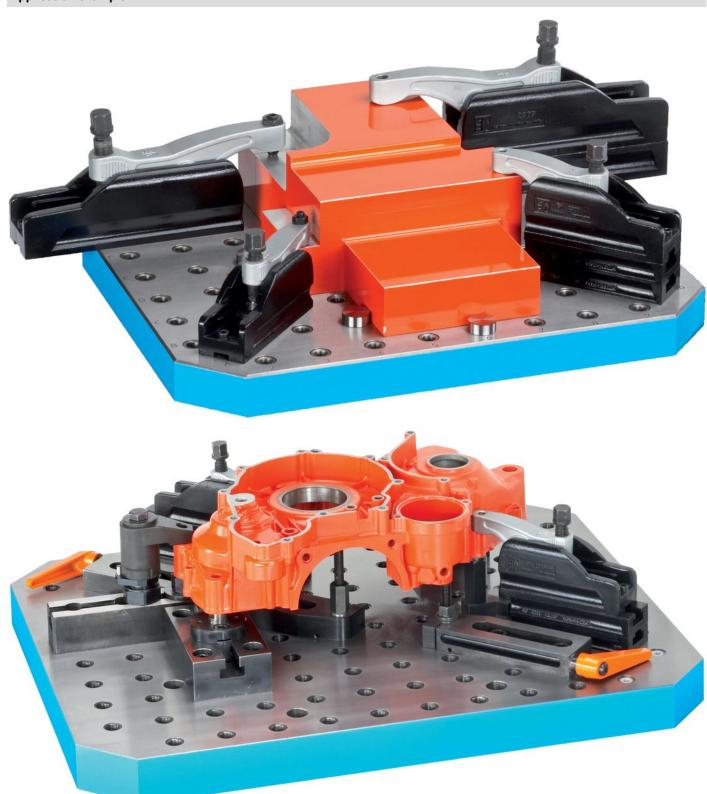

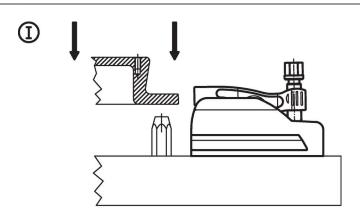

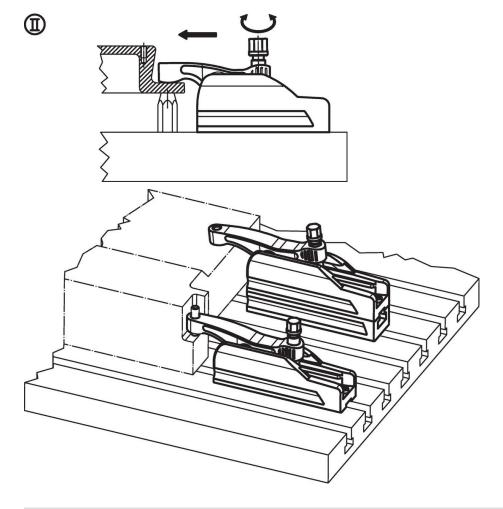

## Compliance

## **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

## **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

## **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Halder France SAS www.halder.fr